



Mauna III LED Fire-rated Downlight

Mauna III


Switchable Wattage & CCT

6W / 4W 3000K/4000K/6000K

Up to **132** $\frac{\text{lm}}{\text{w}}$

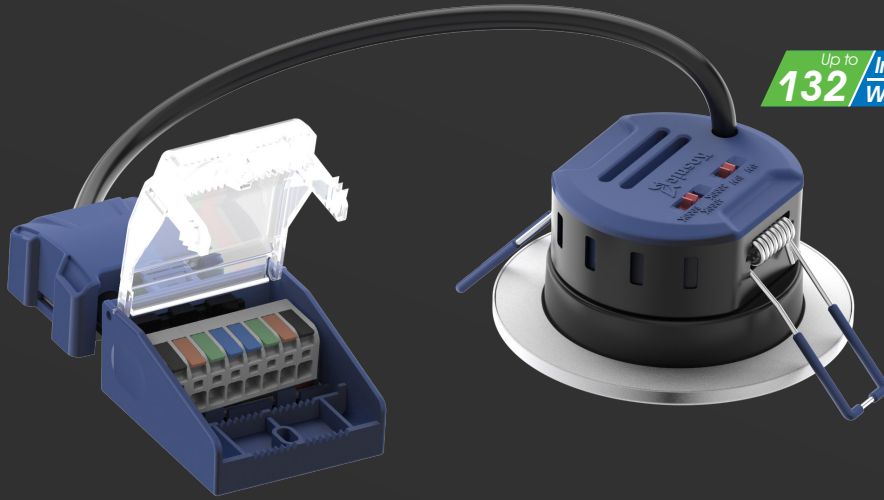

Plug & Play wiring terminal blocks for easy installation



Lever terminals with testing slot are included



Switchable wattage and CCT

Wiring plug-in terminal blocks are packed separately for fast installation

5 multi-pack available
MAU306PK5




Switchable Wattage & CCT

Mauna III Pro

7W / 5W 3000K/4000K/6000K


Up to **134** $\frac{\text{lm}}{\text{w}}$

Wattage and CCT switches accessible on the front of the fitting, under the magnetic bezel

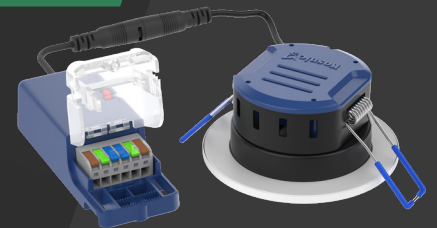

Detachable Driver


The standard driver supplied can be detached for alternative drivers below:



DALI



CASAMBI



Lever terminals with testing slot are included


Patent

Magnetic

One set of bezels for three models



Brass




Matt Black



Matt White



Chrome



Satin Chrome




Antique brass

Except for Mauna Plus Tilt that uses larger bezels

Neka

Universal Non-maintained emergency kit for downlight



- 5 Years** Product Warranty
- 2000V** Surge Protection (L to GND)
- Mains Dimmable** Dimmable



Mauna III X 5 multipack MAU306PK5

Mauna III Upgrade Mar. 2025

6W / 4W Dimmable LED Fire-rated Downlight with Bezel Finish Options

- High efficiency up to 132lm/W
- Switchable wattage and CCT (3000/4000/6000K)
- Optional add-on emergency kits, available in standard and self-test
- Optional PIR sensors compatible with Uni-Remote
- Integrated dimmable driver
- Interchangeable magnetic bezels with different finishes
- Can be installed under Insulation layer with void of 40mm
- Compact size
- Plug-in push-wire terminal
- 5 multipack available

- E+** Add-on emergency
- S** Plug-in ON/OFF sensor
- S** Plug-in corridor sensor
- Watt** Wattage switching
- CCT** CCT switching
- M** Magnetic bezel
- ECO** Modular design
- UR** Uni-Remote Compatible


68mm Cut-out

40mm Void



Up to **132** **lm/W**

- 30 Minutes** I Joist
- 60 Minutes** I Joist
- 90 Minutes** Solid Joist



Push-wire lever terminals included


Recommended



Emergency Kit Neka P112



Mauna PIR sensor P30



Uni-Remote RMT-UNI

Interchangeable bezels



Order Code	Default Power	Alternative Power	Beam Angle	CCT	Lumen*	Energy Class
MAU306 MAU306PK5	-	4W	40°	Switchable**	510lm (360lm) (3000K)	
					530lm (380lm) (4000K)	
					530lm (380lm) (6000K)	
	6W	-	40°	Switchable**	670lm (490lm) (3000K)	
					710lm (540lm) (4000K)	
					710lm (540lm) (6000K)	

* Total lumen (lumen measured in 90° Cone)
 ** When CCT switchable, colour temperature switches between 3000K, 4000K & 6000K

Interchangeable bezels

Order Code	MAUBZ-BAS	MAUBZ-BLK	MAUBZ-WHT	MAUBZ-CHM	MAUBZ-SCH	MAUBZ-ABR
Order Code	MAUBZ-BBR	MAUBZ-BNI	MAUBZ-AGR			
Order Code	MAUBZ-SBAS	MAUBZ-SBLK	MAUBZ-SWHT	MAUBZ-SCHM	MAUBZ-SSCH	MAUBZ-SABR

Optional Gears

Type	Order Code	Description
Emergency kit	EMPAD01	Standard emergency kit
Emergency kit	EMPAD01/SST	Standard & Self-test 2 in 1 emergency kit
PIR sensor	MAUPIR	ON/OFF Fire-Rated PIR sensor
PIR sensor	MAUPIR/D	ON/OFF/ Phase-cut Dimming Fire-Rated PIR sensor

Accessory

Type	Order Code	Description
Remote Control	RMT-UNI	Universal Remote Control for PIR sensors

RF wireless triac dimmer

Order Code	Max Power	Output Current
CYDIMRFT1	2 x 120W (100 Vac) 2 x 288W (240 Vac)	2 x 1.2 A

* See datasheet for recommended number of lamps per dimmer

General Specification

Voltage	220-240Vac 50/60Hz
CRI	>80
SDCM	<6
L70B50 Lifetime	76000h
Power Factor	>0.70
Ambient Temp	-30°C to 50°C
Housing	Zinc coated sheet steel+PC



Order Code

MAU306
MAU306PK5

MAUBZ-BAS
MAUBZ-BLK
MAUBZ-WHT
MAUBZ-CHM
MAUBZ-SCH
MAUBZ-ABR
MAUBZ-BBR
MAUBZ-BNI
MAUBZ-AGR

MAUBZ-SBAS
MAUBZ-SBLK
MAUBZ-SWHT
MAUBZ-SCHM
MAUBZ-SSCH
MAUBZ-SABR

Dimensions

